


FRAME AND GRATE


STANDARD: GALVANIZED STEEL TRAFFIC RATED.
OPTIONAL: ADA, HIGH HEEL PROOF, SOLID
COVER, CAST IRON PARKWAY OR TRAFFIC.

WEIGHTS		
PART NUMBER	HIGHTS	APPROX. LBS
1212-T6	6"	120 LBS
1212x6	6"	131 LBS
1212x12	11"	241 LBS
1212-B12-F	16"	350 LBS

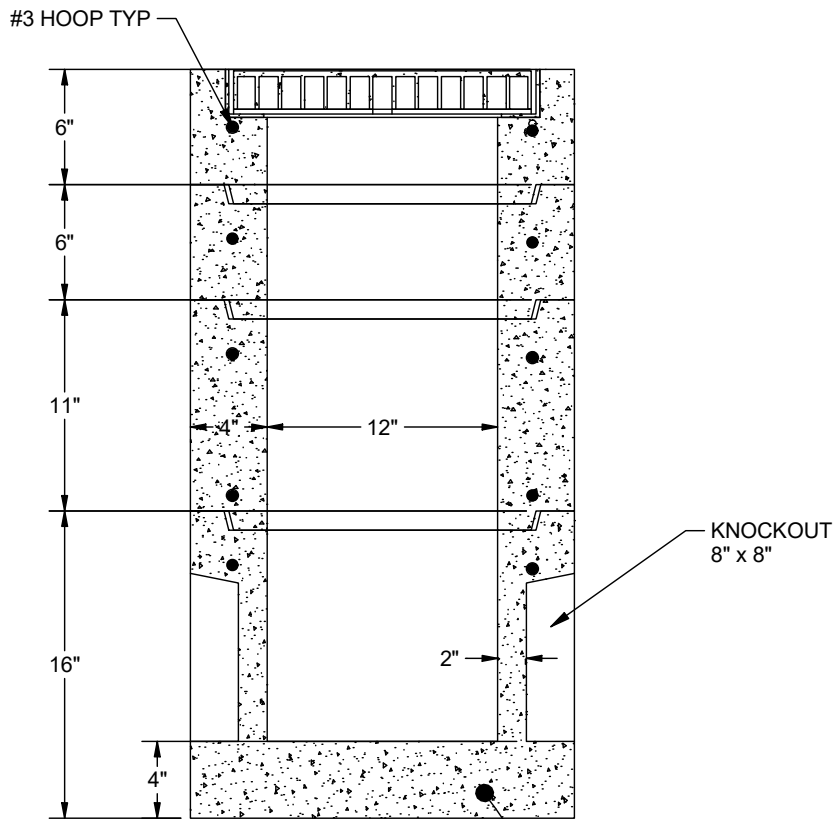

SECTION A-A

FLOOR OPTIONAL

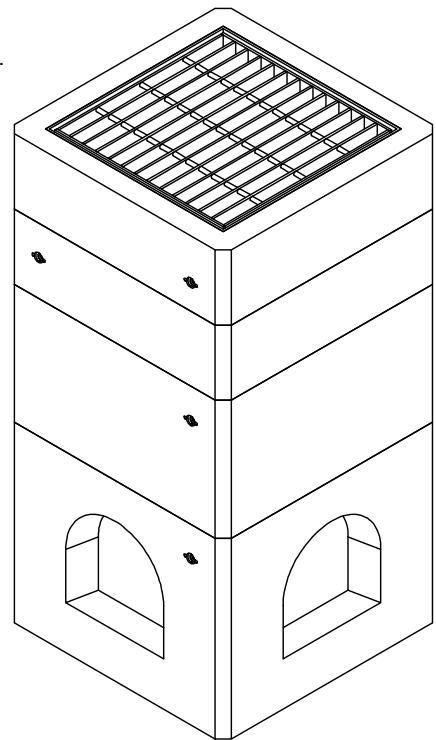

ISOMETRIC VIEW

THIS CATCH BASIN IS A STACKABLE UNIT. THE
SHORTEST YOU MAY GO WITH KNOCKOUT IS 12".
THE SHORTEST WITHOUT KNOCKOUTS IS 6".

1. PRECAST MATERIALS AND MANUFACTURING METHODS SHALL CONFORM TO ASTM C-913.
2. BOX DESIGN LOAD H-20 TRAFFIC.
3. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH F C= 4000 PSI AT 28 DAYS.
4. THE PORTLAND CEMENT USED IN THE PRECAST SECTIONS SHALL MEET THE REQUIREMENTS OF TYPE II/V HIGH SULFATE RESISTANT CEMENT IN ACCORDANCE WITH ASTM C-150.

PRECOR PRODUCTS			
Phone (805) 527-0841 Fax (805) 584-0769			
TITLE CATCH BASIN, 12" x 12", STANDARD			
APPROVED BY	DATE	APPROVED BY	DATE
W. TACK	7/31/2020		
DRAWN BY		MODEL NO.	SH 1 OF 1
W. TACK			